



MAN LIFT

EXPLOSION
PROOF **EX**



A125JEX EXPLOSION PROOF ARTICULATING BOOM LIFT

S SAFETY

- Explosion Proof
- Factory Mutual Approved
- Class 1, Division 1, Group D
- Fully Compliant with the Latest UL 583 Type EX Standard
- ANSI A92.20 & CSA B354.6 Compliant

E STANDARD EQUIPMENT

- 125 ft Platform Height
- 131 ft Working Height
- 36 × 96 in Platform Size
- 12 in Ground Clearance
- 500 lb Platform Capacity
- 63 ft 2 in Horizontal Reach
- Proportional Hydraulic Controls
- Battery Condition Indicator
- Full Height Swing Gate
- Movement Alarm

O OPTIONAL


- Soft Touch System
- 3/8" or 1/2" Airline to Platform
- Spare Battery Pack
- Open Face Platform
- Fall Arrest System
- Hostile Environment Kit
- EX Rated LED Task Lighting

SPECIFICATIONS

Working Height	131 ft	39.9 m
Platform Height	125 ft	38.1 m
Up and Over Height	60 ft 6 in	18.44 m
Platform Size	36 × 96 in	.91 × 2.44 m
Platform Capacity	500 lbs	227 kg
Overall Width	8 ft 2 in	2.49 m
Stowed Length	47 ft 6 in	14.48 m
Stowed Height	10 ft	3.05 m
Jib Range of Articulation	130° (+70 / -60) vertical	
Articulating Jib	8 ft	2.4 m
Ground Clearance (Axle)	12 in	30 cm
Horizontal Reach	63 ft 2 in	19.25 m
Tailswing	3 ft	.91 m
Outside Turning Radius	22 ft 6 in	6.86 m
Drive Speed	1 mph	1.6 km/h
Turret Rotation	358° Non-Continuous	
Batteries	48V DC 900 Amp-Hr	
Platform Rotation	180°	
Weight	53,000 lbs	24,040 kg

Specifications subject to change

MADE IN THE
USA 

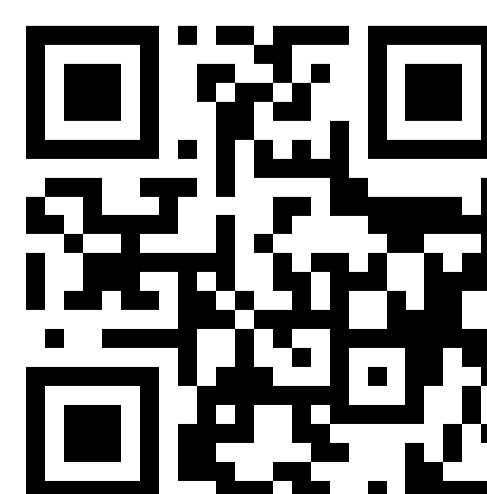

Manufacturer of Custom
Aerial Lifts

manliftusa.com

sales@manliftusa.com